










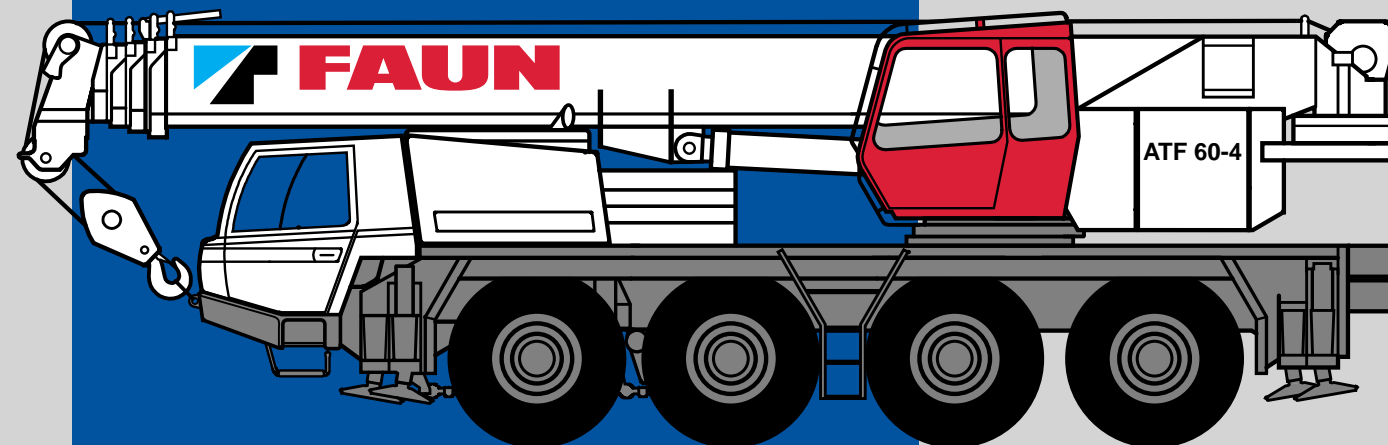
24

	 SERVICE → 
	(0) 91 23 95 50 
	(0) 17 18 11 43 24 
	(0) 91 23 18 51 55
	(0) 91 23 18 52 19
	(0) 91 23 30 85
	Service + Spare parts
	e-mail: <a href="mailto:service@tadanofaun.de">service@tadanofaun.de</a>
	e-mail: <a href="mailto:spareparts@tadanofaun.de">spareparts@tadanofaun.de</a>
	 → <b>++49</b>


TADANO FAUN GmbH  
 Postfach 10 02 64  
 D-91205 Lauf/Germany  
 Tel. (0) 91 23 95 50  
 Fax (0) 91 23 30 85  
<http://www.tadanofaun.de>  
 e-mail: [info@tadanofaun.de](mailto:info@tadanofaun.de)


ALL-TERRAIN  
**ATF 60-4**

ISO 9001




Maße (mm)  
 Dimensions (mm)  
 Dimensiones (mm)

 14.00 R 25

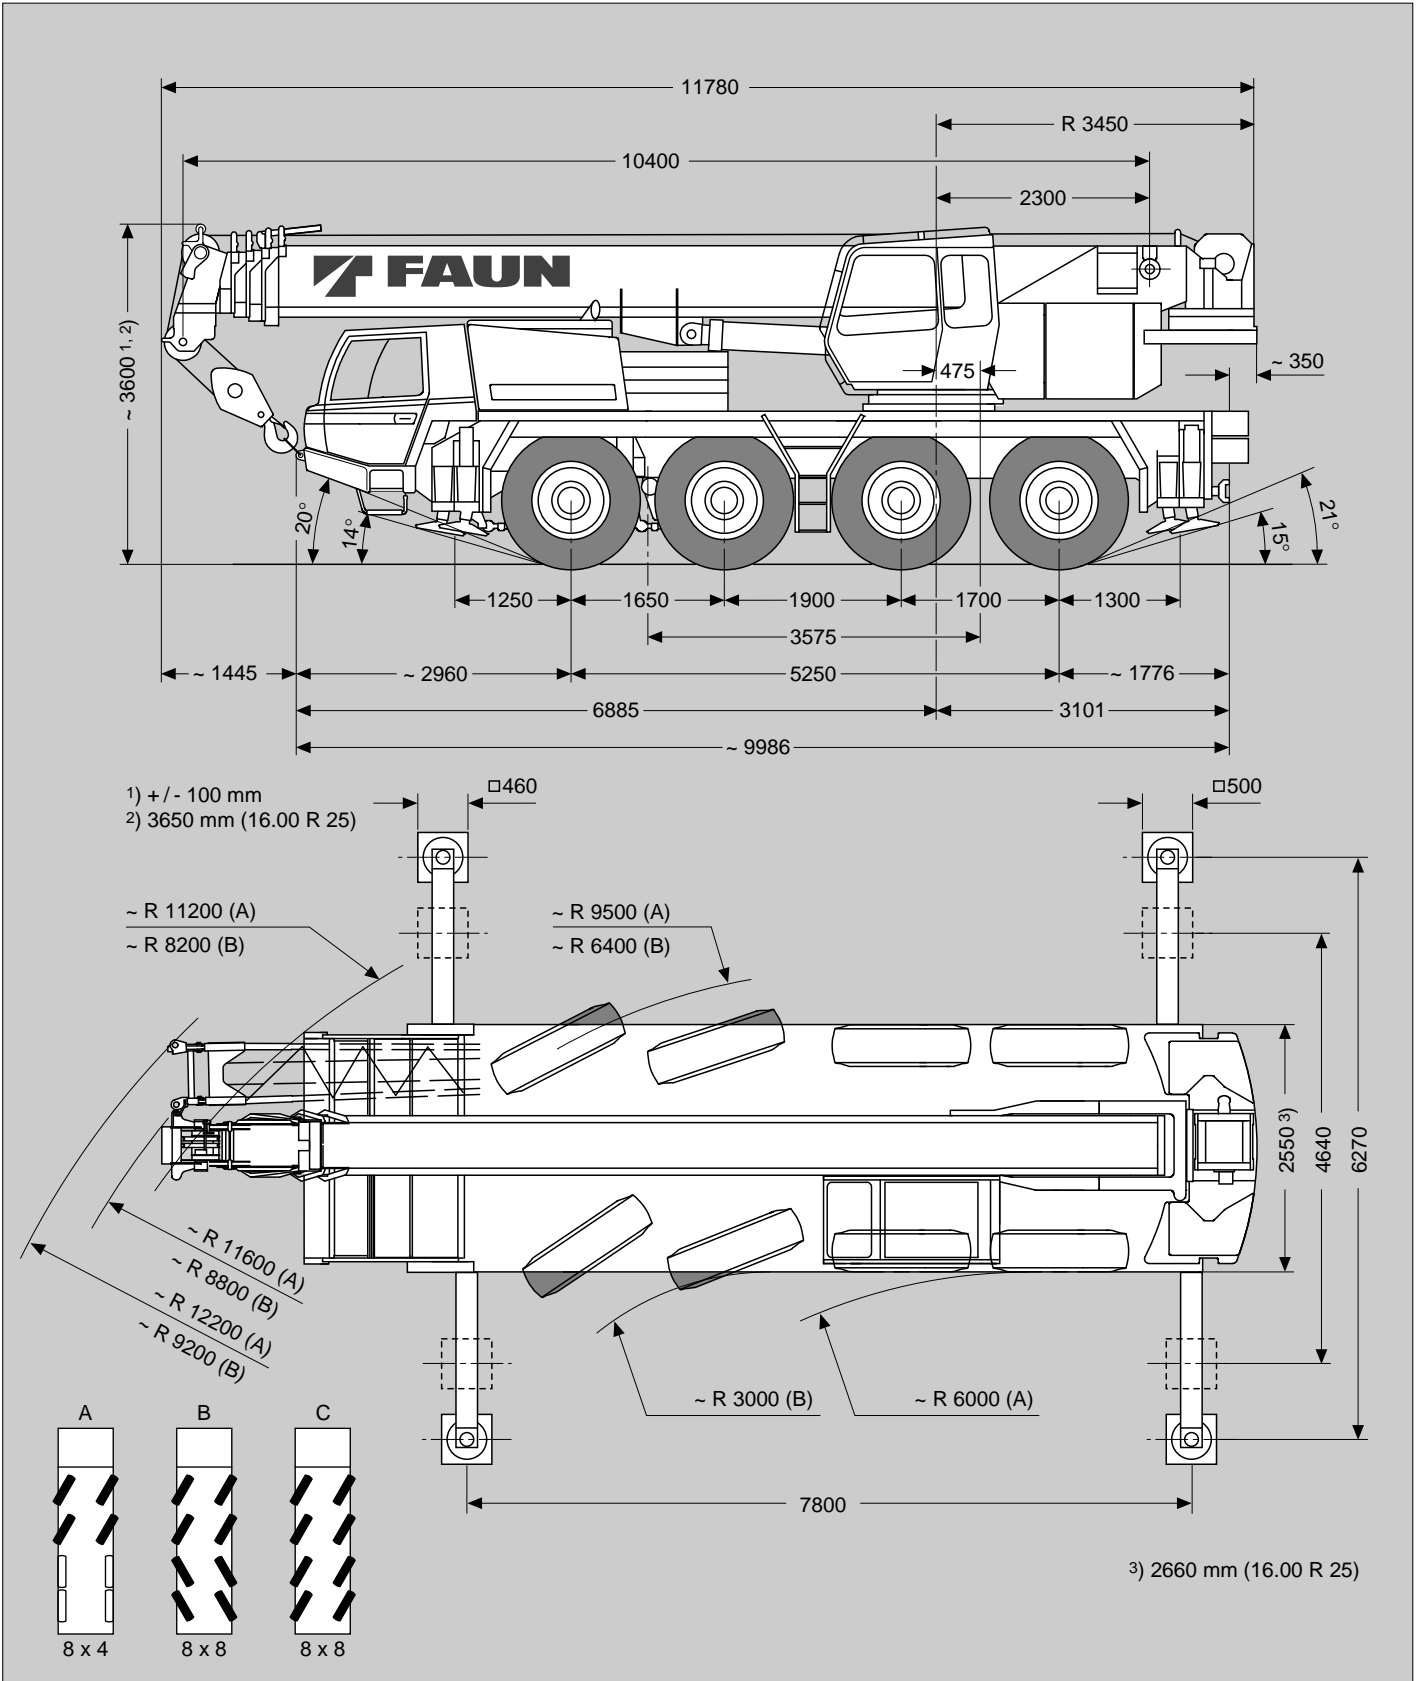



Tragfähigkeiten  
Lifting capacities  
Capacités de levage  
Capacidades de elevación





**13.2t**

**DIN/ISO**


 m	10.4 m	14.1 m	17.8 m	25.3 m	32.7 m	36.5 m	40.2 m
2.5	60.0*						
3.0	50.0	30.0					
3.5	44.8	30.0	30.0				
4.0	41.0	30.0	29.0				
4.5	37.0	30.0	27.5				
5.0	34.3	30.0	26.2	17.0			
6.0	29.8	29.3	22.6	17.0	13.0		
7.0	25.3	24.9	20.0	15.8	13.0		
8.0	16.9	21.4	20.0	14.5	13.0	9.0	7.0
9.0		18.1	18.4	13.3	12.0	8.8	7.0
10.0		15.2	15.5	13.0	11.0	8.5	7.0
11.0		12.9	13.2	12.6	10.1	8.3	7.0
12.0			12.6	12.1	9.2	8.1	7.0
14.0			9.9	9.8	7.8	7.6	6.5
16.0				7.8	6.7	6.5	6.1
18.0				6.8	5.8	5.6	5.3
20.0				5.8	4.8	4.9	4.6
22.0				4.9	4.0	4.1	4.1
24.0					3.6	3.3	3.6
26.0					3.2	2.7	3.0
28.0					2.9	2.2	2.5
30.0					2.7	1.8	2.0
32.0						1.5	1.7
34.0						1.1	1.4
36.0							1.1


 %	I	II	III	IV			
0	0	50	50/100/0	50/100/0	100/0	100	100
0	0	0	50/0/33	50/100/67	100/100	100	100
0	0	0	0/0/33	50/0/67	50/100	75	100
0	0	0	0/0/33	50/0/67	50/100	75	100





**13.2t**

**DIN/ISO**

 m	36.5 m + 9.0 m			40.2 m + 9.0 m			40.2 m + 16.0 m		
	5°	17°	30°	5°	17°	30°	5°	17°	30°
10.0	4.80			3.80					
11.0	4.80			3.80					
12.0	4.80	4.00	3.00	3.80	3.40		2.20		
14.0	4.60	3.75	2.85	3.80	3.40	2.80	2.20	1.80	
16.0	4.40	3.45	2.65	3.70	3.25	2.70	2.20	1.80	1.30
18.0	4.20	3.15	2.50	3.55	3.10	2.55	2.15	1.75	1.30
20.0	3.75	2.90	2.35	3.45	3.00	2.45	2.05	1.65	1.25
22.0	3.40	2.70	2.25	3.30	2.85	2.35	2.00	1.60	1.25
24.0	3.10	2.55	2.15	3.20	2.70	2.25	1.90	1.50	1.20
26.0	2.85	2.40	2.05	2.80	2.55	2.15	1.85	1.45	1.15
28.0	2.35	2.25	1.95	2.40	2.40	2.05	1.70	1.35	1.15
30.0	1.85	2.00	1.90	1.95	2.10	1.95	1.55	1.30	1.10
32.0	1.50	1.60	1.70	1.60	1.70	1.80	1.45	1.25	1.05
34.0	1.15	1.25	1.30	1.25	1.35	1.45	1.35	1.15	1.00
36.0	0.85	0.90	0.95	0.95	1.05	1.10	1.30	1.10	1.00
38.0	0.60	0.65	0.65	0.70	0.75	0.80	1.15	1.05	0.95
40.0		0.40	0.40	0.45	0.50	0.55	0.90	1.00	0.90
42.0							0.75	0.85	0.90
44.0							0.55	0.65	0.75
46.0								0.45	0.50


 %	I	II	III	IV
	100	100	100	100
	100	100	100	100
	75	100	100	100
	75	100	100	100

Hubhöhen  
Lifting heights  
Hauteurs de levage  
Alturas de elevación



13.2t

DIN/ISO

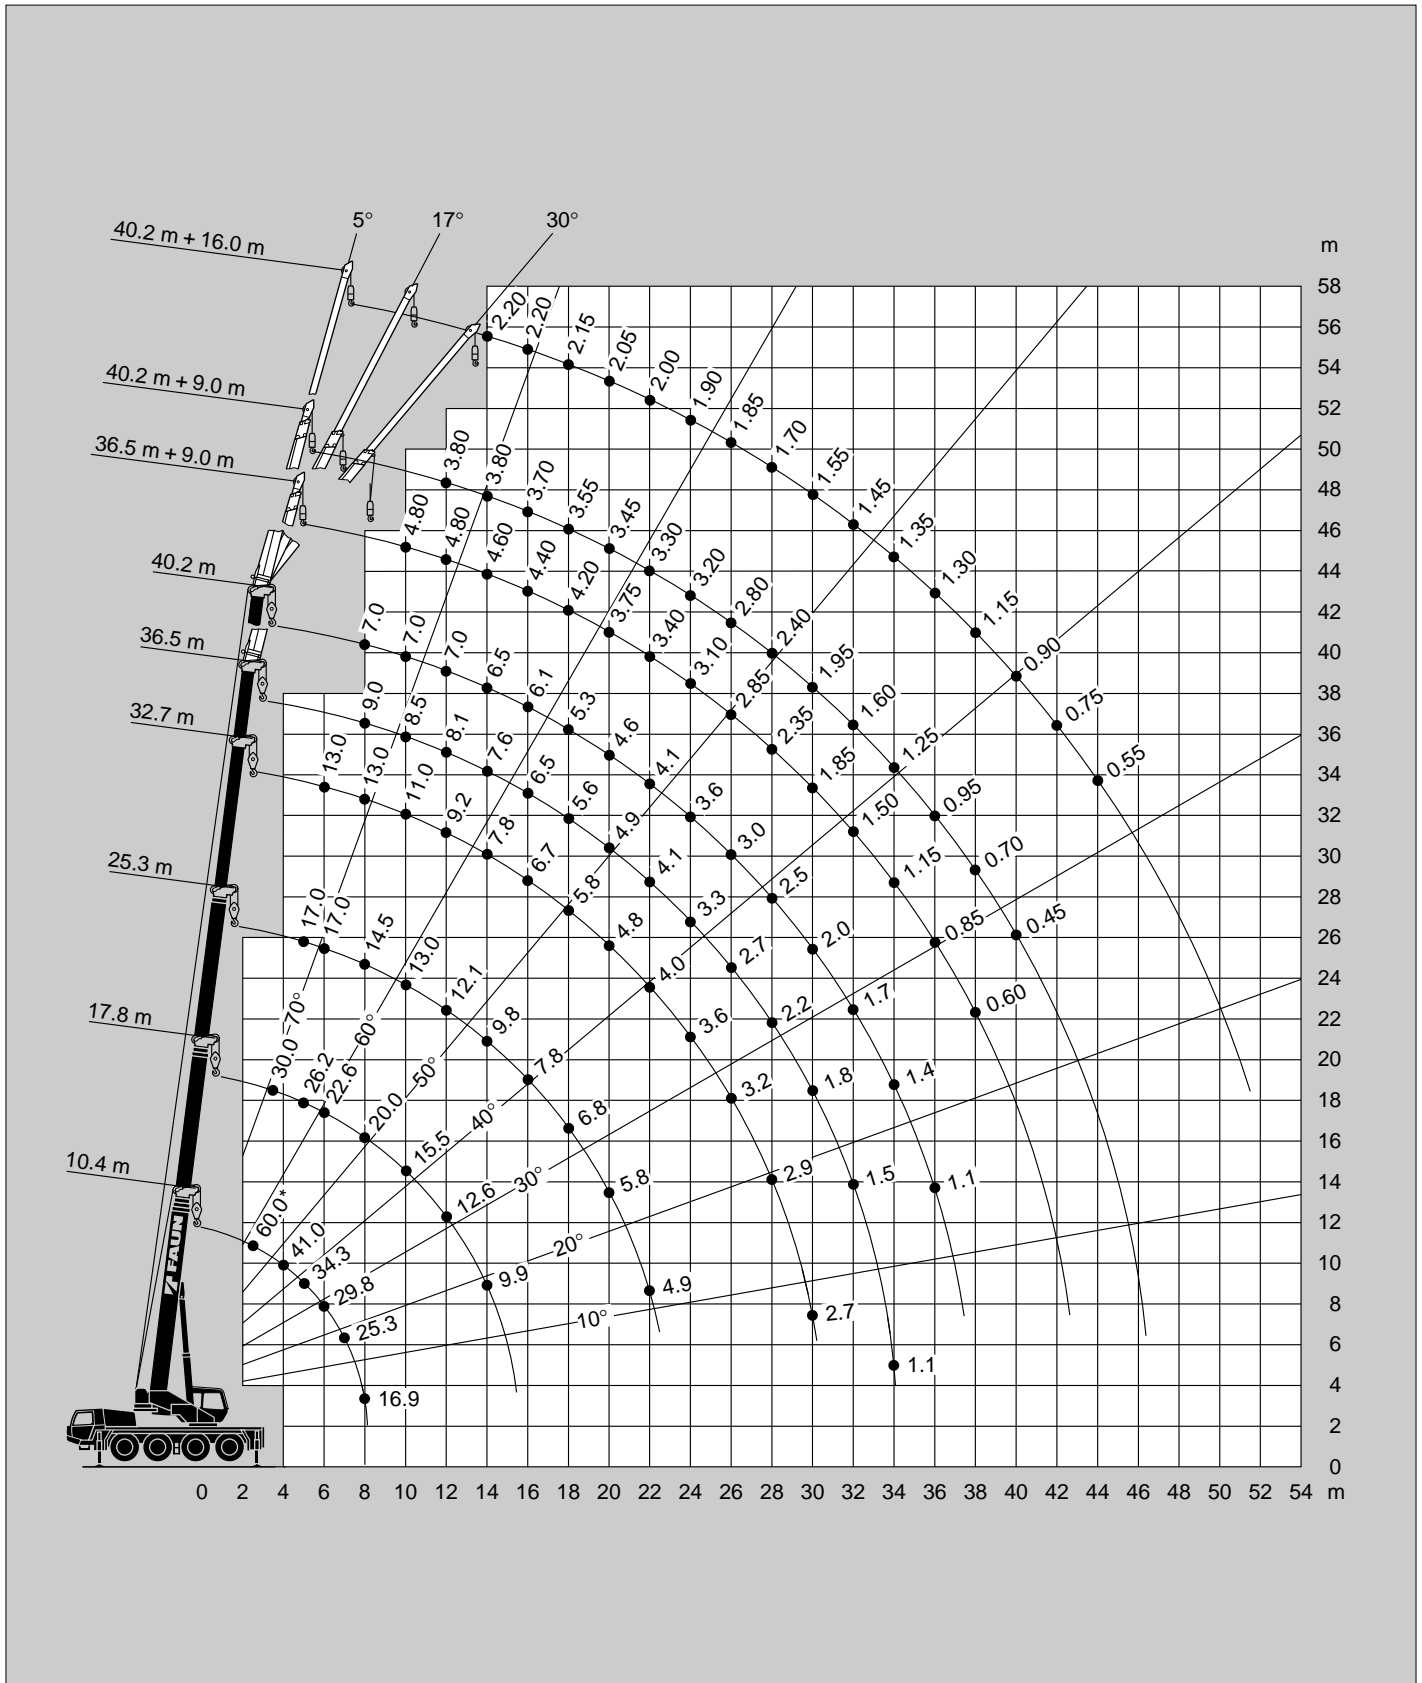



Hakenhöhen / Kopfhöhen  
 Hook height / Tip height  
 Hauteurs sous crochet / Hauteurs tête de flèche  
 Altura del gancho / Altura de la punta

